

Fig. 1

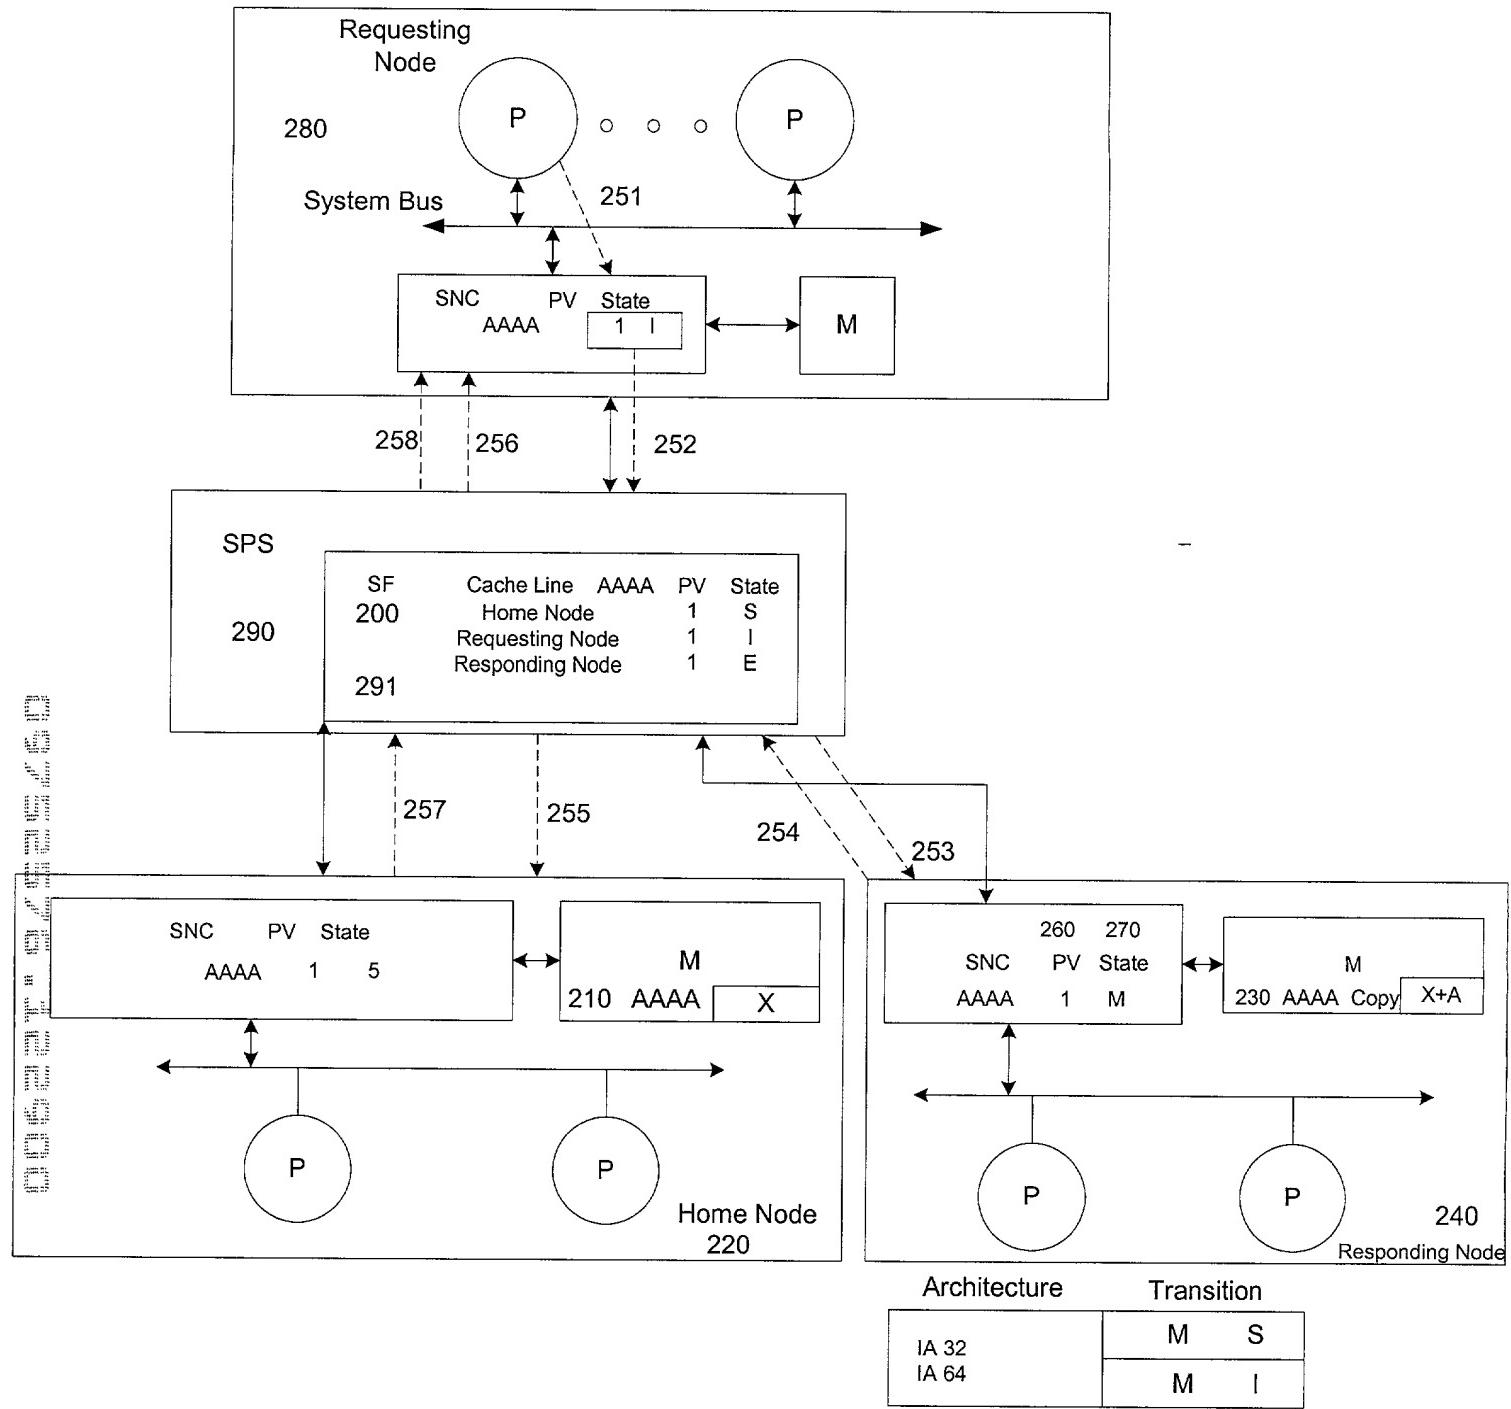


Fig. 2

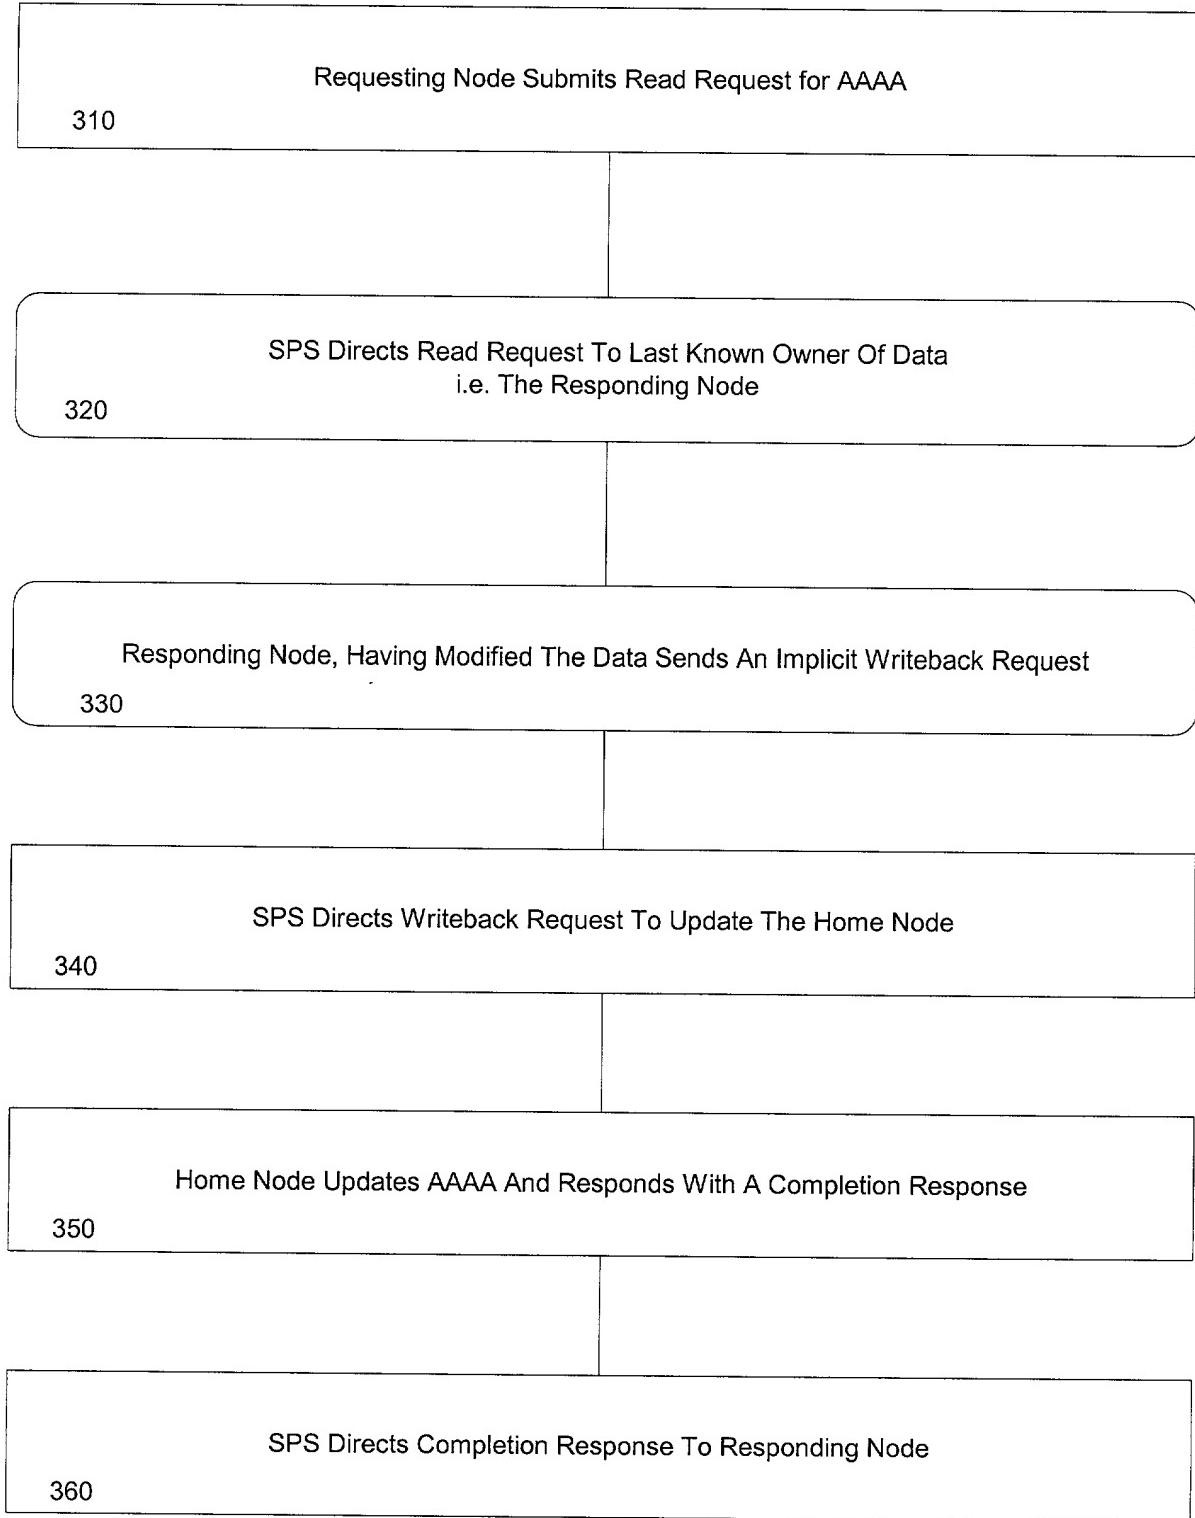


Fig. 3

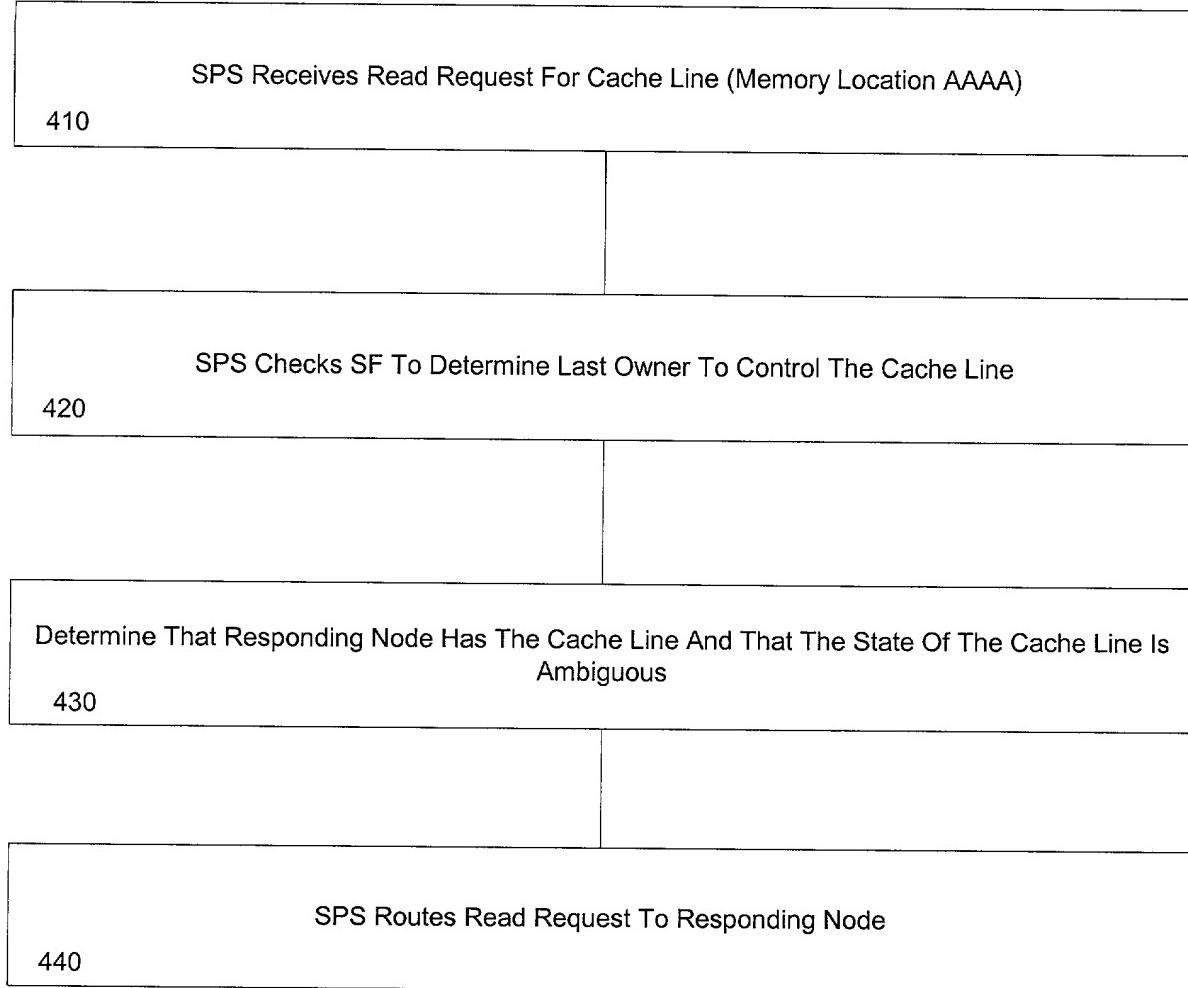


Fig. 4

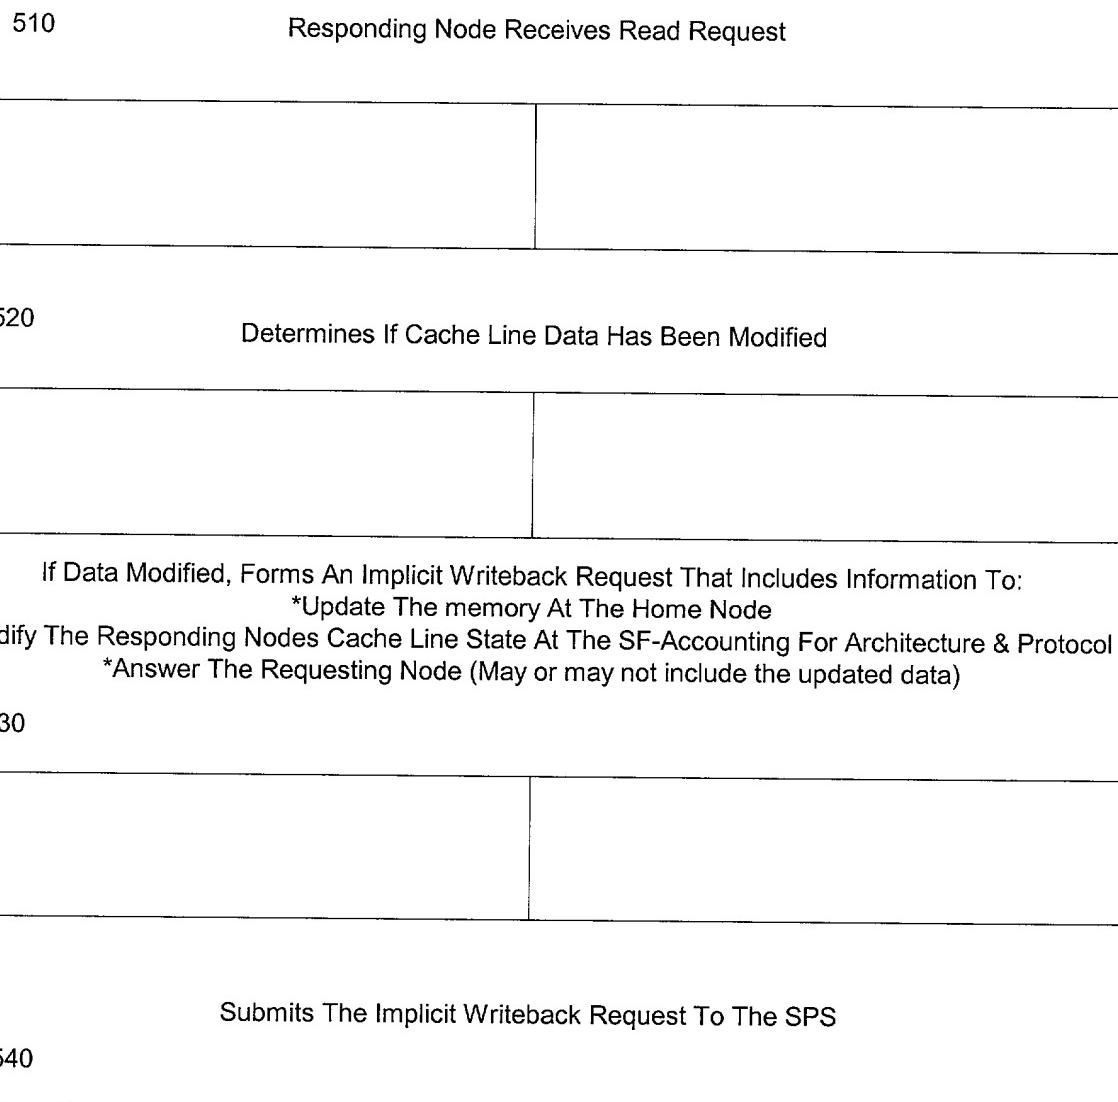


Fig. 5

| | 14 Bits | 4 Bits | 2 Bits | 20 Bits |
|----------|--------------------|------------------------------------------------|-------------|----------|
| | 620 | | 610 | |
| phit (0) | Reserved | Resp Type [3:0] | Route [1:0] | Reserved |
| 611 | Route Bits | Conveyed Meaning | | |
| 612 | [1] | provide data to requesting node | | |
| | [0] | update home node memory "i" implicit writeback | | |
| 614 | Response Type Bits | Conveyed Meaning | | |
| 613 | [3:2] | type of response; "11" = snoop response | | |
| | [1:0] | state; "10" M S; "11" = M S | | |

Fig. 6

| Request | IA64 | IA32 | IOH | Route [1:0] |
|-------------------|----------------|----------------|----------------|-------------|
| 10 PRLC/PRLD | PSNRM | PSNRMS | PSNRM | 11 |
| 20 PSIL PSILND | PSNRM PSNRM | PSNRM PSNRM | PSNRM PSNRM | 11 10 |
| 40 PSFCL | PSNRM | PSNRM | PSNRM | 10 |

Fig. 7

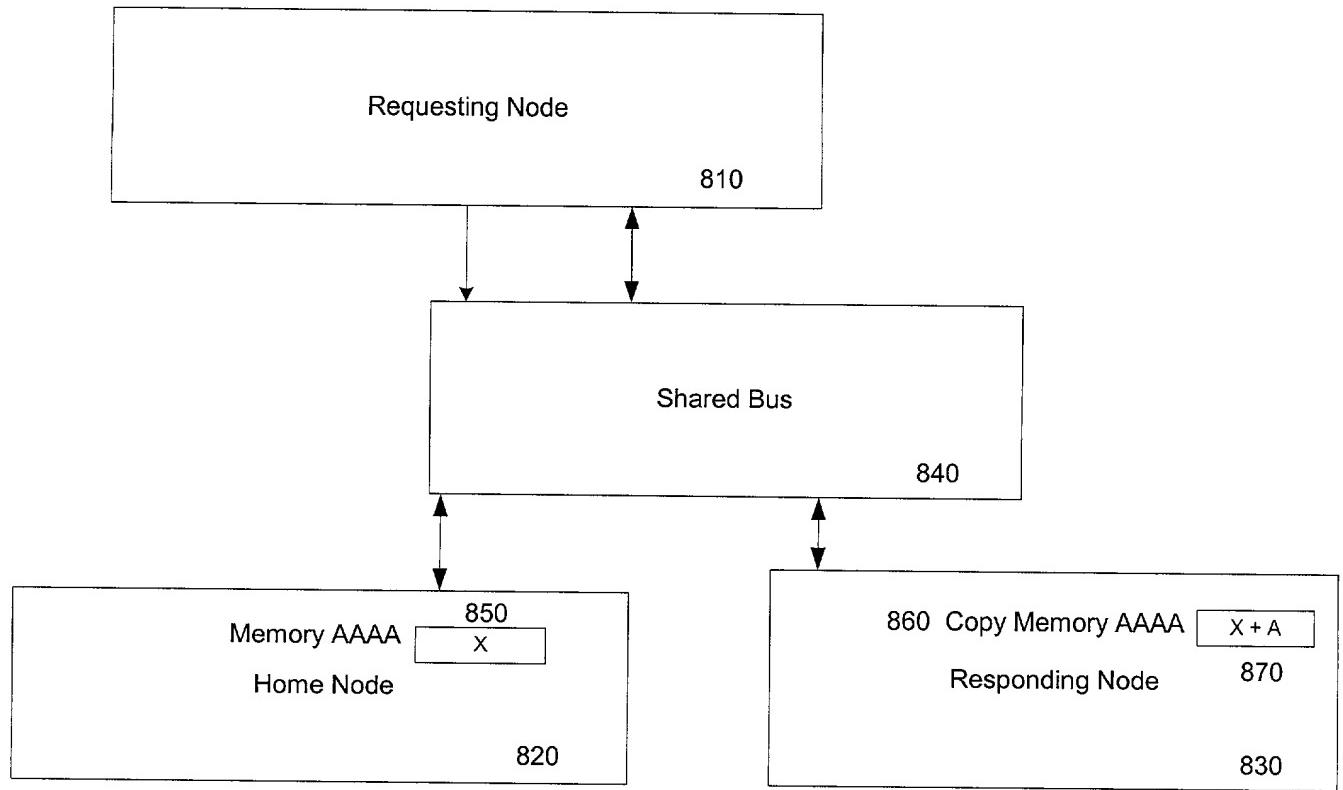


Fig. 8

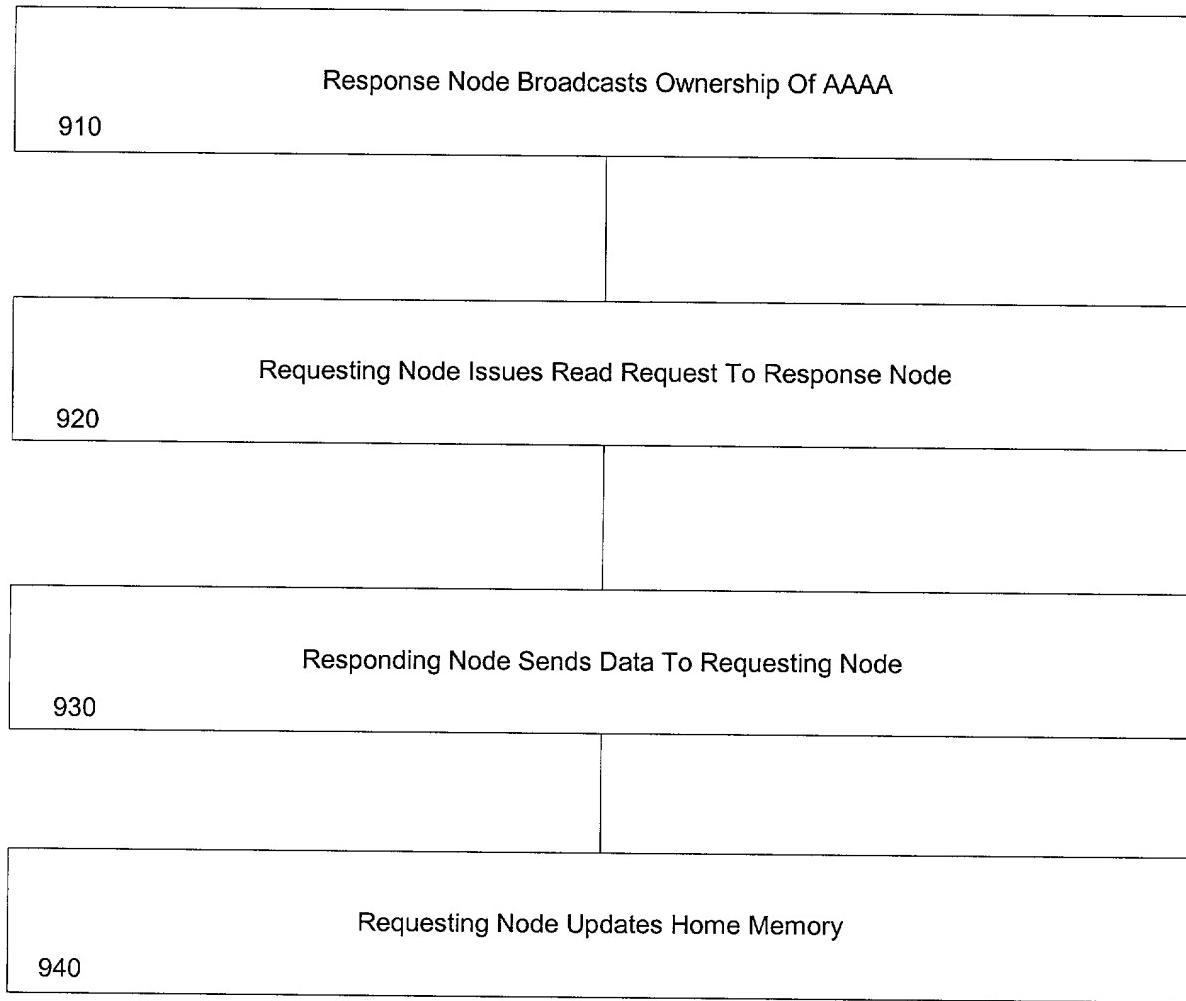


Fig. 9